
ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0150/C0151/0152/C0153

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THESE INSTRUCTIONS.

Warning: LED electronics can be damaged by electro static discharge (ESD)shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

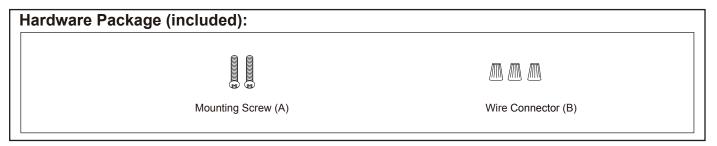


Installation Steps

Turn off the power at fuse or circuit box

- 1. Remove the metal ring and plastic shade from ceiling pan by unscrewing the cap nuts.
- 2. Attach the two mounting screws to the outlet box, and screw them in 2 to 3 turns.
- 3. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - ---Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - ---Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - ---Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire connector. Carefully put the wires back into the outlet box.
- 4. Attach the ceiling pan to the outlet box by inserting two mounting screw heads into the key holes, and rotate the ceiling pan until it is locked in place, then secure the mounting screws tightly.
- 5. Lay the plastic shade into metal ring, attach them up to the ceiling pan by inserting the threaded studs, then secure them with cap nuts.


Turn on the power at fuse or circuit box

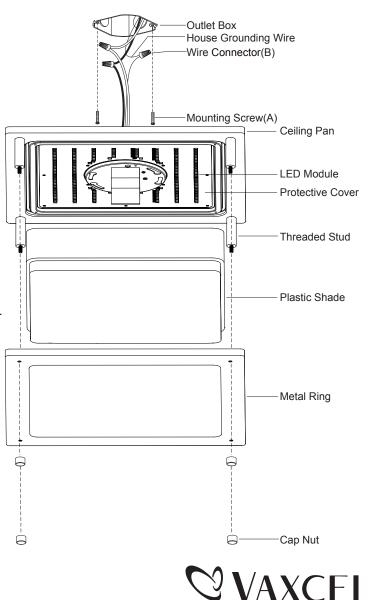

171023

This fixture is dimmable with a forward phase electronic dimmer. Dimmers tested to be compatible with this fixture are the Lutron: DVWCL-153PH, MACL-153MH, SCL-153PH, TGCL-153P. If you are unfamiliar with electrical installations, it is recommended you have a qualified electrician for your installations.

The following parts are available for re-order if damaged or missing.

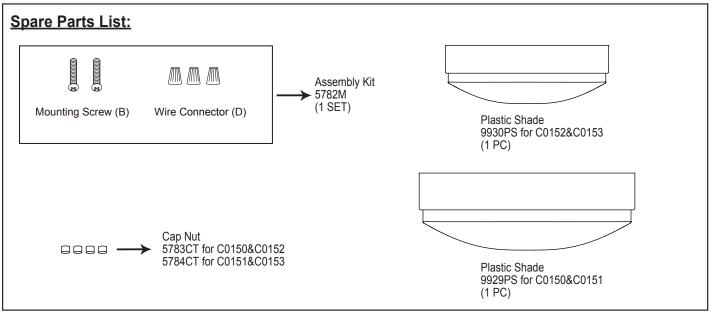

5-YEAR LIMITED WARRANTY:

All products are warranted to be free of defects in material and workmanship for five (5) years from date of purchase. This warranty is limited to the correction of any such defect, or the replacement of any such defective item(s), provided that: (a) we are properly notified and consent to return of the item(s) in question:(b) the item (s) is / are returned with proof of purchase date; and (c) it is found upon inspection by us that the item (s) is / are defective as noted above. This warranty dose not cover labor costs, consequential damages, nor dose it apply to any item(s) that have been improperly installed, overloaded, altered, or otherwise abused by the customer, its agent(s) or emplyee(s). Finishes are specially excluded from the terms of this warranty since they are subject to environmental maintenance deemed beyond our control. Other than the described obligation, we assume no further liability with respect to the sale or use of our products.We make no warranty, express or implied, and disclaim any warranty of merchantability or fitness for a particular purpose.

